
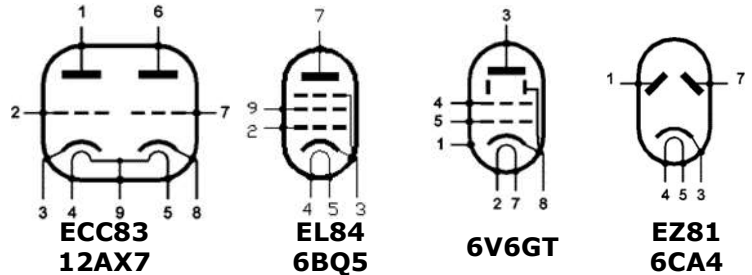


* Denotes power ground tied to chassis separate from pre-amp.

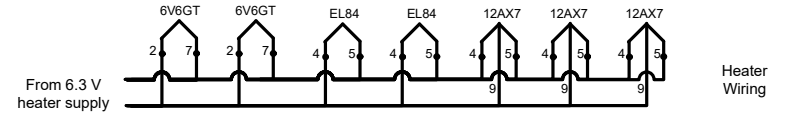

REV.	DESCRIPTION	DATE	BY
1	First Release	4 Oct 2012	SC
5	26/05/13 mains changed to 220-240 VAC		
6	3/12/13 R12 changed from 20K to 22K		
7	C1 changed to .0047, C8,9 changed to .01	10/02/14	
8	Power Tube Cathode switch resistors changed to 220K	27/04/14	
9	14Nov18 New PT Hook-Up		SC

Notes
 1. Resistors - 1/2 watt carbon composition except as noted
 2. Input 68K & 1M are 1W Carbon Film
 3. 0.01 & 0.02 Coupling Caps Sozo or Mallory 150
 4. Metal oxide resistors thru power supply, plates & on the power tube screens.

THIS DESIGN PROPERTY OF TRINITY AMPS INC. FOR PERSONAL USE ONLY

Trinity Amps

v6 - Dual Power Tube with Boost

SIZE	FSCM NO	DWG NO	REV
SCALE	1 : 1	SHEET	13 OF 48